



# Celebrating

**ANNIVERSARY** 

SANFORD is celebrating 10 years of business success, Ever since its inception, SANFORD has been committed to delivering high-quality solutions with a special focus on interior decoration.



Wethink

Defining excellence as we see it has become a natural process over the years.

We believe in the power of innovation, the uniqueness of Italian design, the importance of sustainability, the strength of discipline in all fields and the value of the people who work for us.

For many years we have worked with the world's leading architects, managing cross-border projects, supporting their creative quest and exchanging valuable know-how in order to constantly improve our products and align our services with their evolving needs.

We like to think of ourselves as real partners with real values that will sustain architectural excellence today, tomorrow and in the future.



Non - absorbent





Resistance to UV






Hot resistance



frost resistance



Chemical resistance





scratch resistance



High resistance to brea



## Our journey

#### 2010-2011

Sanford came in to existence and starts producing soluble salts.

#### 2012-2013

Sanford participates in **ACE TECH** event and starts producing glazed porcelain tiles. (PGVT/GVT)

#### 2014-2015

Sanford launches new sizes In PGVT | GVT.

Sanford doubles its production capacity in just 5 years.

#### Sanford The Branding Heart Cutting-Edge **Technology Since 2010.**

Since 2010, Sanford is spearheading the industry with its cutting-edge technology and outstanding design.

#### 2018-2019

Sanford launches its successfully.

#### 2020-2021

Sanford provides extensive collection of tiles based on customer's needs and expectations.

own slab production









2016-2017

Sanford launches 20mm, 16mm,12mm in fullbody.

ceramic expo event.

The company participates in **ACE TECH** event and vibrant







# Our Export



Usa Pomania

Brazil
Ecuador

EgyptThiland

Poland
Vietnam

Saudi arabia
Indonesia

South africa
Cambodia

South korea
Bahrain

Taiwan > Oman

> Uae > Qtar

France
Iraq

Yemen Russia

Mexico

Greece

We Give You More Than Exporting















COMMERCIAL & PUBLIC FLOOR \_ WALL



HOSPITALITY
FLOOR \_ WALL



EXTERNAL CLADDING WALL



OFFICE BUILDING
FLOOR \_ WALL



SHOP & BOUTIQUE
FLOOR \_ WALL
LIGHT COMMERCIAL FLOOR RENOVATION


### Endless Destinations

#### A variety of solutions both technical and stylistic.

Project Evolution slabs offer designers a vast selection of materials, with sizes and finishes that can add value to any type of interior environment: from hotels to airports, from lofts to country houses. In the same manner, they are an attractive and durable option for outdoor fallades of private and public buildings.






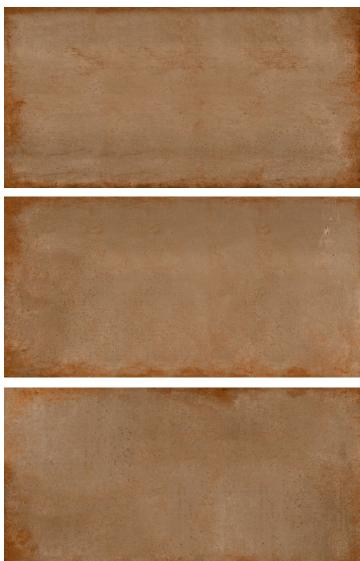

SPARKLE BARCELONA BROWN

- 600X1200MM CARVING



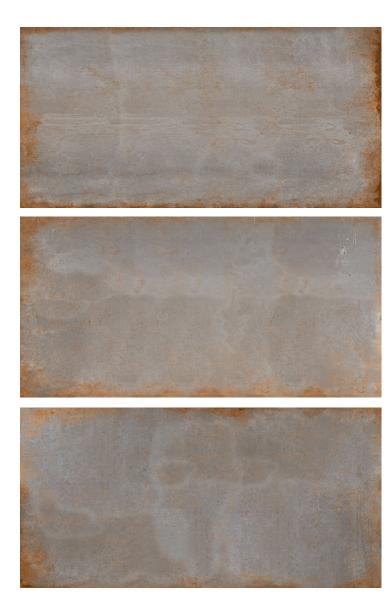


#### SPARKLE BARCELONA GREY

- 600X1200MM CARVING







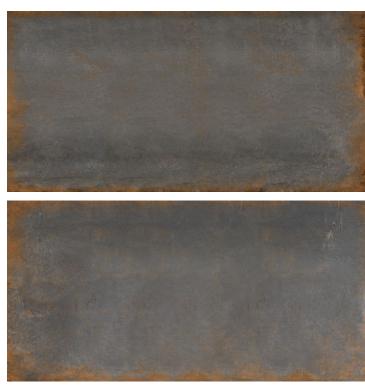




SPARKLE BARCELONA BLACK

- 600X1200MM CARVING



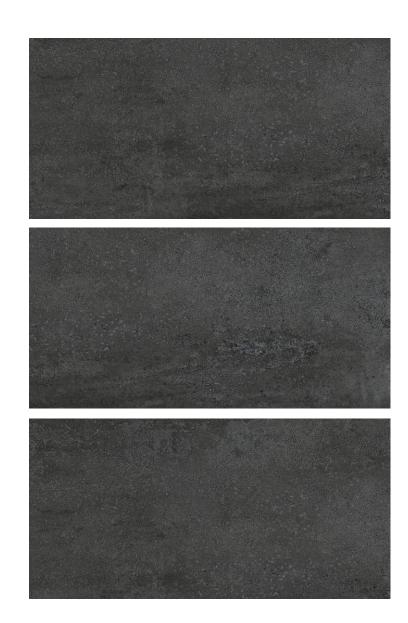


#### SPARKEL CEMENTTO BLACK

- 600X1200MM CARVING







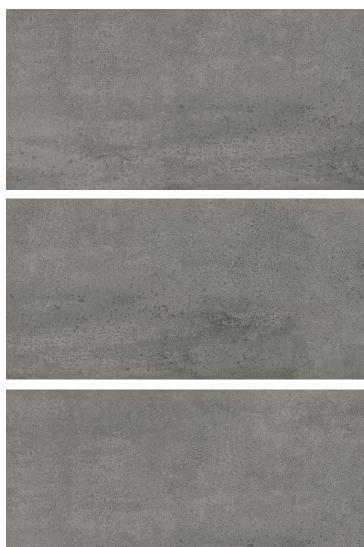

#### SPARKEL CEMENTTO GREY

- 600X1200MM CARVING









#### SPARKEL CEMENTTO BROWN

- 600X1200MM CARVING














#### SPARKEL CEMENTTO LIGHT GREY

- 600X1200MM CARVING



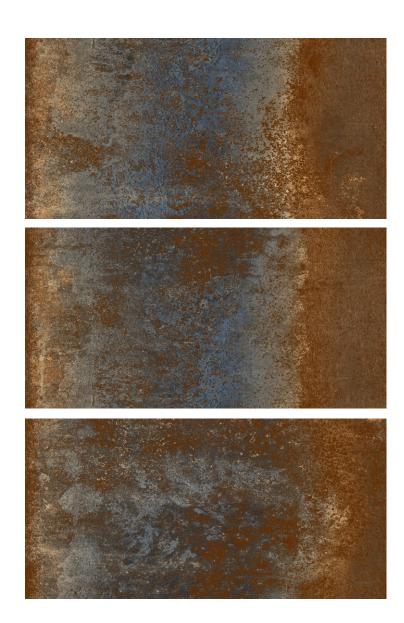

## SPARKLE MILDURA

- 600X1200MM CARVING



#### **Technical Specification**

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD
REGULATORY PROPERTIES	.0.504		.0.1.0/	150 40545 0
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROI	PERTIES			
Modulus of rupture	Min. 35 N/mm²	Min. 40 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
mpact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PRO	PERTIES			
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101
THERMO HYGROMETRIC PRO	PERTIES			
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.5x10 <sup>-6</sup>	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

#### **PACKING DETAILS**

SR. NO	PRODUCT	NOMINAL SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600x600mm	9mm	4	1.44 Sq. Mtr.
2	VITRIFIED TILES	600x1200mm	9.50mm	2	1.44 Sq. Mtr.
3	VITRIFIED TILES	200x1200mm	9.50mm	6	1.41 Sq. Mtr.
4	VITRIFIED TILES	800x1600mm	9mm	2	2.56 Sq. Mtr.
5	VITRIFIED TILES	1200x1200mm	9mm	2	2.88 Sq. Mtr.
6	VITRIFIED TILES	800x2400mm	15-18mm	1	1.92 Sq. Mtr.
7	VITRIFIED TILES	1200x2400mm	9mm	1	2.88 Sq. Mtr.



#### **Sanford Vitrified Pvt Ltd**

At:- Sartanpar, Tal:- Wankaner,
Dist:- Morbi.
Sartanpar - 363622
Morbi.(Guj.)India.
Phone: 02828 296680

Export:

Phone: +91 9909908726 Email: export@sanfordvitrified.com

Domestic:

Phone: +91 9909908710
Email: marketing@sanfordvitrified.com