ARC SERIES 600X1200MM





COLORSHADES



# CERAMIC MADE IN INDIA SYNONYMOUS WITH QUALITY AND STYLE.

SANFORD
THE BRANDING
HEART CUTTING
EDGE TECHNOLOGY
SINCE 2010.

Since 2010, Sanford is spearheading the industry with its cuttingedge technology and outstanding design.

We are Sanford. We believe in creating world-class products which are made in India with an international touch. We have made a niche for ourselves for magnificent manufacturing and innovative design.


We have emerged as globally renowned manufacturers of stunning ceramic products for our outstanding infrastructure and technology, unprecedented designs and classy, novel products. It's not so much about physical and material resources but it's more about the vision and philosophy of delivering matchless products in a timely fashion to provide ultimate satisfaction to the clients.

The thrust on inimitable quality coupled with advanced technology has led us to scale new peaks year after year since the inception of Sanford in 2010. We produce proven products that have re-shaped the industry standards and propelled the industry forward.

We are particularly proud of our team at Sanford. Whether it's R & D, manufacturing or customer service, our team is a cut above the rest and delivers the quality in time.

Sanford continues to push the frontiers of design and innovation for ceramic products made in India.

www.sanfordvitrified.com

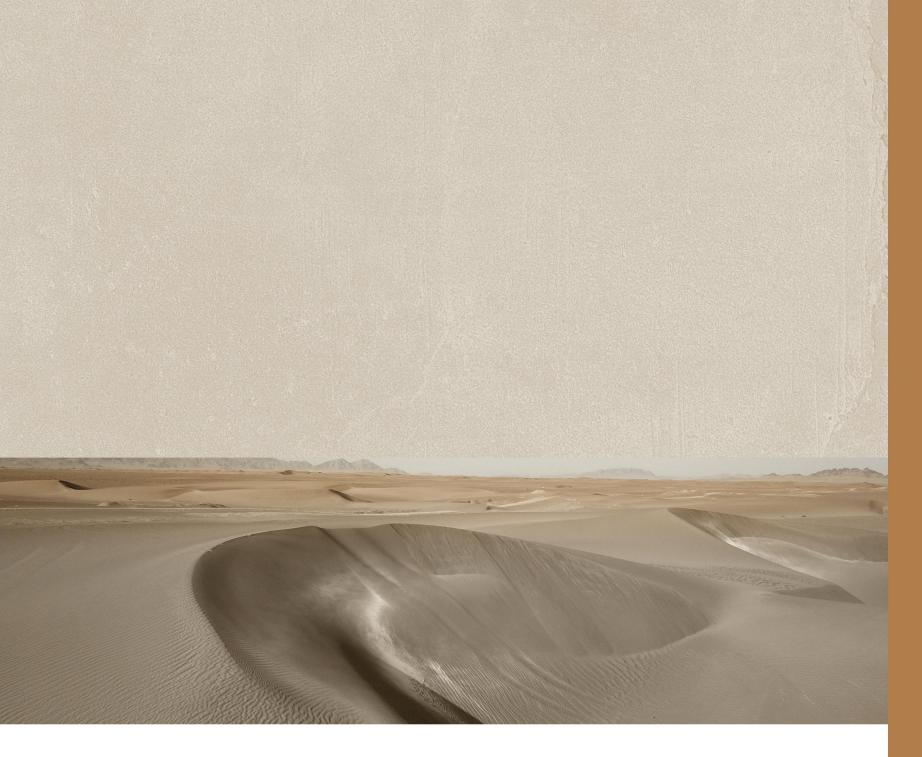

# INSPIRATION

Inspiring from the color shades of natural beauty we are designing something marvelous that give your quality ambiance to meaningful classic and contemporary combination of look and create that Symbolizes Simplicity of Comfort for your space.





# INNOVATION

We are serving Glorious abstractness of design innovation to create extraordinary feel for every wall space and make them more graceful with our luxury wall tiles and create aesthetic perfect context that suited to various styles of interior.

## APPLIGATION

We are presenting the natural finest of result for your quality spaces and make them more graceful. We are offering different tiles with rang of colors, textures and designs and size that is fit for your every space.



Home indoor flooring and wall cladding



Elevation



Commercial & public are



Industrial areas



Hospita



Gardens and public areas



Office, shop & boutique building



Big projects

# GOLOR



**SIZE** 600X1200MM

**SURFACE** MATT

THICKNESS 9MM

www.sanfordvitrified.com




### SIZE 600X1200MM | SURFACE MATT





SPLIT LIGHT GREY

4 Phase

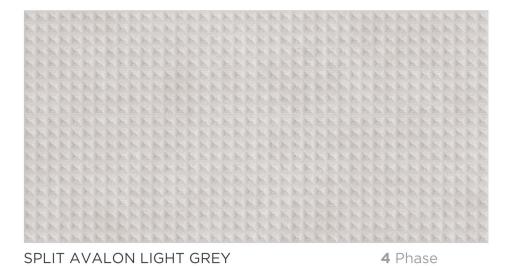

### Application






### SIZE 600X1200MM | SURFACE MATT






SPLIT CREMA 4 Phase

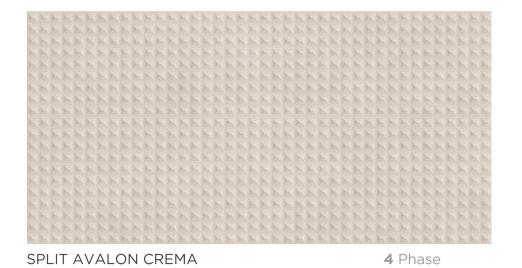



### **Application**



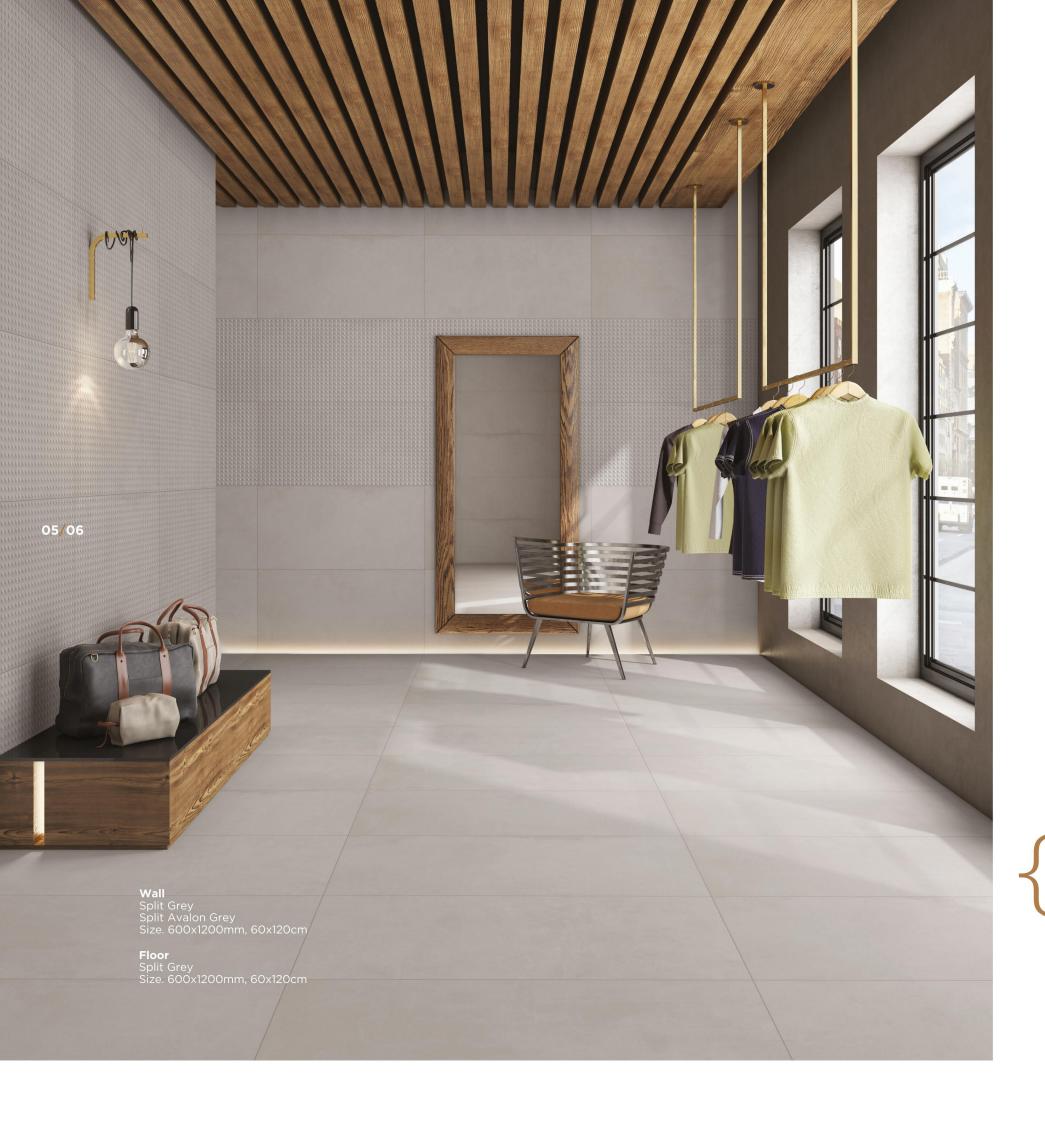


### SIZE 600X1200MM | SURFACE MATT





SPLIT GREY 4 Phase

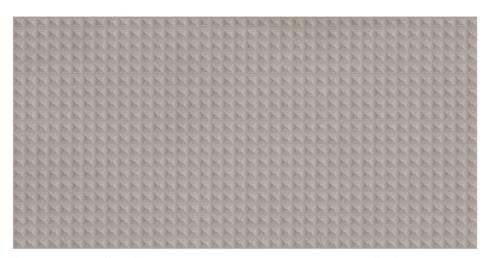

SPLIT AVALON GREY

4 Phase

### Application





### SIZE 600X1200MM | SURFACE MATT





SPLIT BROWN



SPLIT AVALON BROWN

4 Phase

### **Application**






### SIZE 600X1200MM | SURFACE MATT





SPLIT BLACK 4 Phase

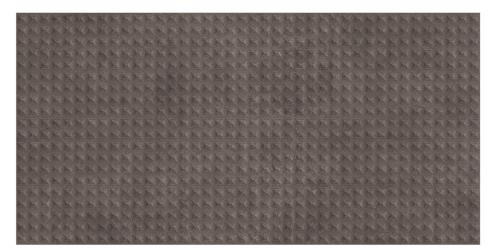

SPLIT AVALON BLACK

4 Phase

### Application



### **Technical Specification**

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPE	RTIES			
Modulus of rupture	Min. 35 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	Min. 40 N/mm <sup>2</sup>	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPE	RTIES			
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101
THERMO HYGROMETRIC PROP	ERTIES			
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 <sup>-6</sup>	Max. 6.5x10 <sup>-6</sup>	Max. 6.5 x 10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given off	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

### **PACKING DETAILS**

SR. NO	PRODUCT	NOMINAL SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600x1200mm	9 mm	2	1.44 Sq. Mtr.



### SANFORD

#### SANFORD VITRIFIED PVT. LTD.

At. Sartanpar, Tal. Wankaner, Dist. Morbi, Pin. 363 622, (Guj.), India.

**Call.** (02828) 296680

Export

Mail.
export@sanfordvitrified.com

Mail.
marketing@sanfordvitrified.com

Domestic